

NOVA POS

Secondary Display Option

Auxiliary monitors in various sizes and mounting options! perfect for order/payment verification, advertising, and KDS integration.




NOVA POS
Main System

15"
Secondary Display

Max. 3m

The 15" and 15.6" customer monitors can be separated and used independently with an extension cable, allowing a distance of up to 3 meters.

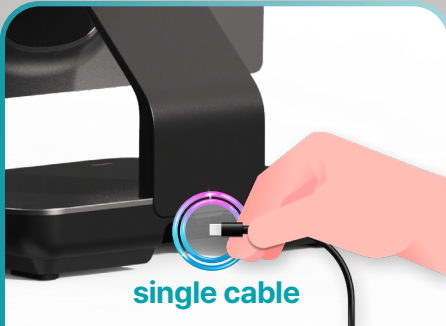

single cable

One-Cable Setup

Power, video, touch, and data all in one!



Sleek & Premium Design

Durable aluminum frame elevates your store's style.



Expandable Peripherals

Supports card readers, NFC, and more!



Various Displays



Model	Touch : NOVA-CDT97 Non-Touch : NOVA-CDN97	Touch : NOVA-CDT15 Non-Touch : NOVA-CDN15	Touch : NOVA-CDT16 Non-Touch : NOVA-CDN16
Display Size	9.7inch	15inch	15.6inch
Monitor Technology	TFT LCD, Air Bonding	TFT LCD, Optical Bonding	
Brightness	350cd/m ²	400cd/m ²	300cd/m ²
Resolution DPI	1024 × 768 Resolution		1920 × 1080 Resolution
Pixel Pitch(H x V)	0.192mm x 0.192mm	0.297mm × 0.297mm	0.17925mm × 0.17925mm
Pixel Arrangement	RGB Vertical Stripe		
ContrastRatio	900	1000	
ResponseTimes(typ.)	25ms	30ms	25ms
Touch(Optional)	PCAP 10 Point Multi-touch		
Interface	Input	Mini DP to mini DP cable (Power Source, Touch & display data transfer through a single cable)	
	Peripheral	-	Dual side ports(Pogo Pin) Each port can support USB and RS-232 I/F for Dallas, MSR & IC reader
Viewing Angle	178 degrees	170 degrees	
LED Life Time (Min)	15000Hrs	50000Hrs	30000Hrs

*Specifications are subject to change without prior notice.

